

A-MTK 2016 new launching the AH21K9M PnP wireless IP camera! The new PnP cam provides you all the protection functions you need:




1. PIR for human detection
2. Motion detection for moving object
3. Audio detection for abnormal sound
4. Camera tampering for prevent IP camera from broken
5. Built in IR LED and ICR, day and night surveillance



Upon the above detections happening, A-MTK smart phone apps will trigger different actions to warn you:

1. Audio alert
2. Send push notify to smart phone
3. Save event video to mSD card
4. Send event video to your Google drive

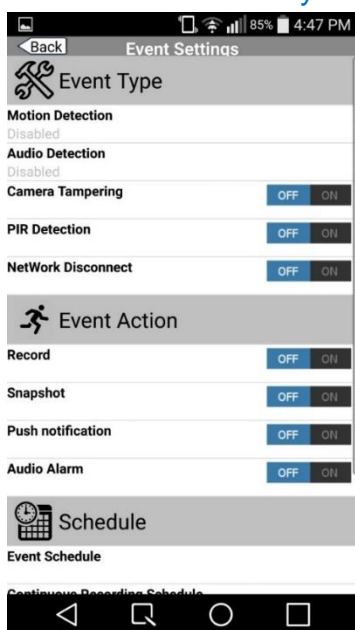

Easy, user friendly setup

Step 1: When you firstly get the AH21K9M, only need to plug and power, download smart phone apps:



Panoview (for Andorid)




i-Panoview (for iOS)


Step 2: Open the APPs and click "First Install"



www.a-mtk.com
sales@a-mtk.com
TEL: +886-2-82269855
FAX: +886-2-82269800

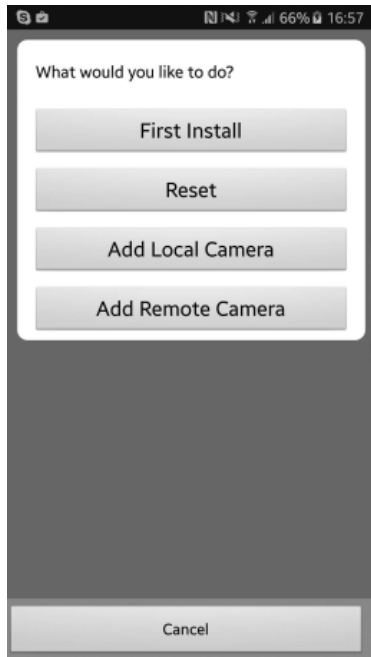


Step 3: Choose "WIFI"

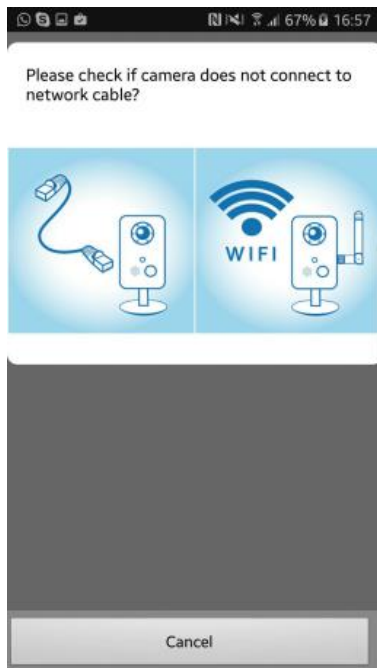



Step 4: Type your Access point Wifi password, and IP camera password.
Then Apps will searching for wireless cameras in same access point



www.a-mtk.com
sales@a-mtk.com
TEL: +886-2-82269855
FAX: +886-2-82269800

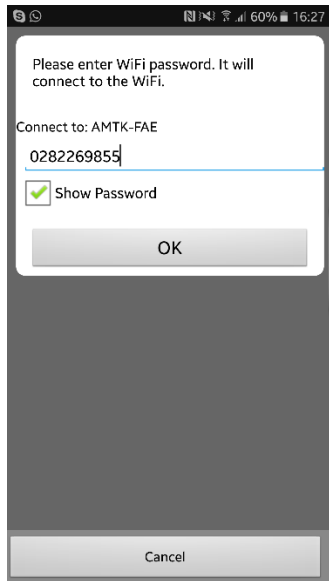

Step 4: Apps automatically find the camera
Now, you get the live video!

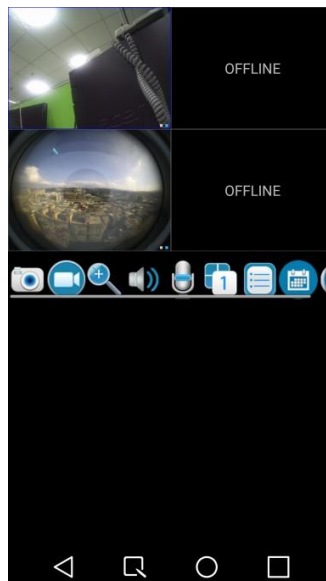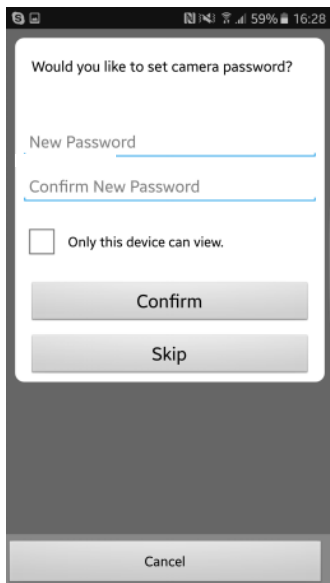


Everything on mobile phone

Setup motion detection window on A-MTK apps; playback mSD card or Google drive video on A-MTK apps




www.a-mtk.com
sales@a-mtk.com
TEL: +886-2-82269855
FAX: +886-2-82269800

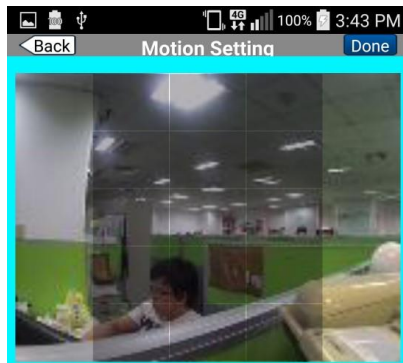

Delete All

Sensitivity 90%

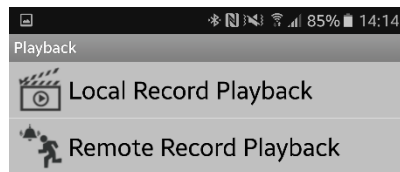

General Specification

Model AH21K9M

Effective Pixel: 720P HD

Lens: fixed: 2.6mm

IR LED: High-light IR LED * 1pc, ICR for day and night

Video

Video Encoder: H.264

Video Resolution: User can choose HD or VGA resolution for live view and recording.

Dual streaming

Live View: 4pcs IP cams quad view

Audio

Audio CODEC: AAC

Audio Input / Out: Built-in MIC. Built-in speaker

Network

Ethernet: 10/100M auto negotiation

Wireless: 802.11n

Device ID: Dips ID

Security: HTTPS encryption

Users: 2 simultaneous users (to one IP cam)

System Integration



www.a-mtk.com
sales@a-mtk.com
TEL: +886-2-82269855
FAX: +886-2-82269800

Alarm Triggers: PIR detector for human detection (far-infrared), Motion detection, Camera tampering, Audio Detection

Motion Detection: Video motion detection up to 9 windows

Alarm Events: Video file or Snapshot upload to Google drive™, Video file or Snapshot save to IP cam mSD card, Audio alert to IP camera speaker out, Push notify to “Panoview” or “i-Panoview”

General

Power Supply: 12V DC external power adapter

Connectors: RJ-45 10BaseT/100Base, TXSMA Antenna, 12V DC power jack, mSD card, Factory default reset

Indication LED: Green and orange LEDs

Operating Temperature: 0°C ~ 40°C

Operating Humidity: 20% ~ 80% (non-condensing)

Panoview™ supported OS

Android: Android 4.4 or above

iOS: iOS 9.0 or above